

# CP-102E/102EL Series

## 2-port RS-232 PCI Express boards



### Features and Benefits

- PCI Express 1.0 compliant
- 921.6 kbps maximum baudrate for fast data transmission
- 128-byte FIFO and on-chip H/W, S/W flow control
- Low-profile form factor fits small-sized PCs
- Drivers provided for a broad selection of operating systems, including Windows, Linux, and UNIX
- Easy maintenance with built-in LEDs and management software

### Certifications



## Introduction

The CP-102E and low-profile CP-102EL are 2-port PCI Express boards designed for POS and ATM applications. Moxa's PCI Express boards are a top choice of industrial automation engineers and system integrators, particularly since the boards support many different operating systems, including Windows, Linux, and UNIX. The CP-102E/EL's 2 RS-232 serial ports support a fast 921.6 kbps baudrate and provide full modem control signals to ensure compatibility with a wide range of serial peripherals. In addition, the boards' x1 classification allows them to be installed in any PCI Express slot.

### Smaller Form Factor

The CP-102EL is a low-profile board that is compatible with any PCI Express slot. The CP-102EL board only requires a 3.3 VDC power supply, which means that the board fits any host computer, ranging from shoebox to standard-sized PCs.

### Drivers Provided for Windows, Linux, and UNIX

Moxa continues to support a wide variety of operating systems, and there is no exception for the CP-102E/EL boards. Reliable Windows and Linux drivers are provided for all Moxa boards, and other operating systems, such as WEPOS, are also supported for embedded integration applications.

## Specifications

### Serial Interface

|                           |  |
|---------------------------|--|
| Comm. Controller          | MU860 (16C550C compatible)                             |
| Bus                       | PCI Express 1.0  |
| Connector                 | CP-102E: 2 x DB9 male<br>CP-102EL: DB25 female         |
| FIFO                      | 128 bytes  |
| Max. No. of Boards per PC | 8  |
| No. of Ports              | 2  |
| Serial Standards          | RS-232   |
| Baudrate                  | 50 bps to 921.6 kbps (supports non-standard baudrates) |
| Stop Bits                 | 1, 1.5, 2  |

|  |  |
|--|--|
| Parity                                 | None, Even, Odd, Space, Mark   |
| Flow Control                           | None, RTS/CTS, XON/XOFF  |
| <b>Serial Signals</b>                  |  |
| RS-232                                 | TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND   |
| <b>Serial Software Features</b>        |  |
| Windows Drivers                        | DOS, Windows 95/98/ME/NT/2000, Windows XP/2003/Vista/2008/7/8/8.1/10 (x86/x64), Windows 2008 R2/2012/2012 R2 (x64), Windows Embedded CE 5.0/6.0, Windows XP Embedded   |
| Linux Drivers                          | Linux kernel 2.4.x, Linux kernel 2.6.x, Linux kernel 3.x   |
| UNIX Drivers                           | QNX 6, Solaris 10, UnixWare 7, SCO OpenServer 5, SCO OpenServer 6  |
| <b>Power Parameters</b>                |  |
| Input Current                          | CP-102E: 520 mA @ 3.3 VDC<br>CP-102EL-DB9M: 552 mA @ 3.3 VDC   |
| <b>Physical Characteristics</b>        |  |
| Dimensions                             | CP-102E: 85.04 x 1000 mm (3.35 x 3.94 in)<br>CP-102EL-DB9M: 67.21 x 100 mm (2.65 x 3.94 in)  |
| <b>LED Interface</b>                   |  |
| LED Indicators                         | Built-in Tx, Rx LEDs for each port   |
| <b>Environmental Limits</b>            |  |
| Operating Temperature                  | 0 to 55°C (32 to 131°F)  |
| Storage Temperature (package included) | -20 to 85°C (-4 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |
| <b>Standards and Certifications</b>    |  |
| EMC                                    | EN 55032/24  |
| EMI                                    | CP-102E: CISPR 32, FCC Part 15B Class A<br>CP-102EL-DB9M: CISPR 32, FCC Part 15B Class B   |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m<br>IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV<br>IEC 61000-4-5 Surge: Power: 2 kV<br>IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m<br>IEC 61000-4-8 PFMF |
| <b>Declaration</b>                     |  |
| Green Product                          | RoHS, CRoHS, WEEE  |
| <b>MTBF</b>                            |  |
| Time                                   | 4,947,552 hrs  |
| Standards                              | Telcordia (Bellcore) Standard TR/SR  |
| <b>Warranty</b>                        |  |
| Warranty Period                        | 5 years  |
| Details                                | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>   |


## Package Contents

|               |   |
|---------------|---|
| Device        | 1 x CP-102E/102EL Series serial board   |
| Documentation | 1 x document and software CD<br>1 x quick installation guide<br>1 x warranty card |

## Dimensions


### CP-102E

Unit: mm (inch)

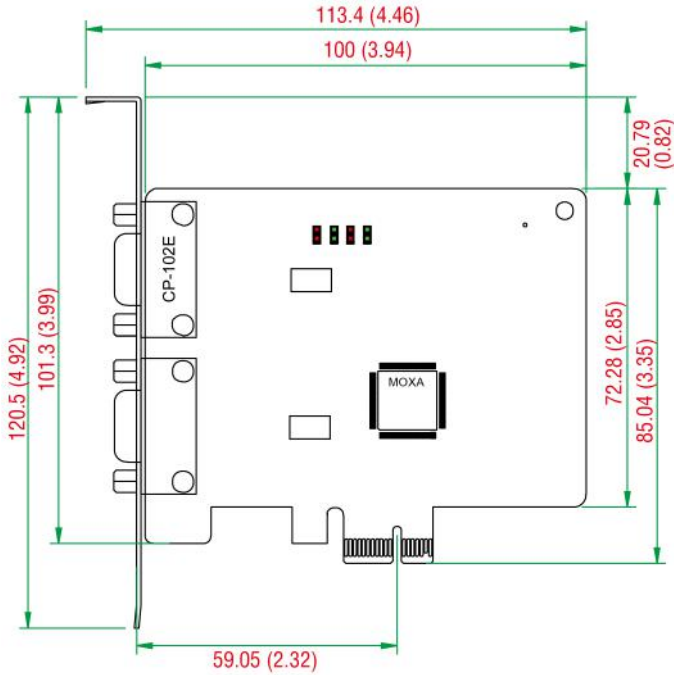

### CP-102EL

Unit: mm (inch)

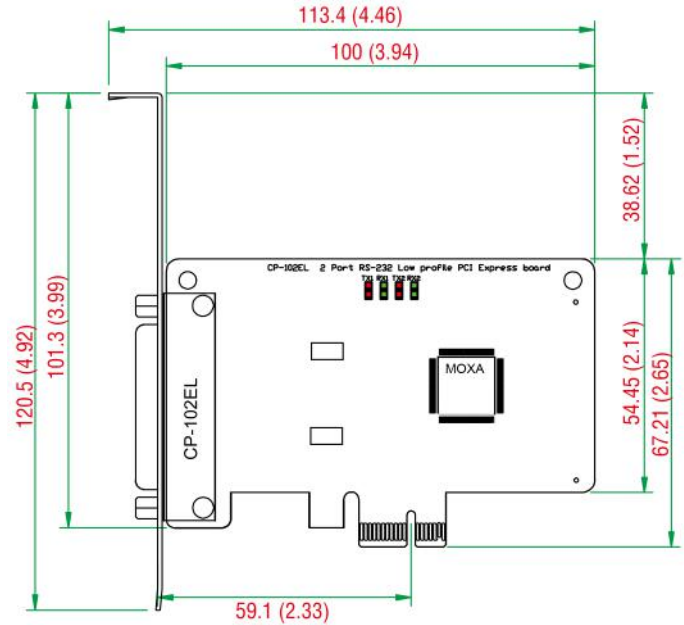

## Ordering Information

| Model Name    | Serial Standards | No. of Serial Ports | Included Cable | Form Factor    |
|---------------|------------------|---------------------|----------------|----------------|
| CP-102EL-DB9M | RS-232           | 2                   | CBL-M25M9x2-50 | Low profile    |
| CP-102E       | RS-232           | 2                   | -              | Standard board |

## Accessories (sold separately)

### Cables

|                |  |
|----------------|--|
| CBL-F9M9-150   | DB9 female to DB9 male serial cable, 1.5 m |
| CBL-F9M9-20    | DB9 female to DB9 male serial cable, 20 cm |
| CBL-M25M9x2-50 | M25 to 2 x DB9 male cable, 50 cm           |
|                | Applicable Models:<br>CP-102EL-DB9M        |

### Brackets

|               |                                     |
|---------------|-------------------------------------|
| 3095010000007 | Bracket for DB44 pack               |
|               | Applicable Models:<br>CP-102EL-DB9M |
| 1490000001000 | Bracket for DB44 pack               |
|               | Applicable Models:<br>CP-102EL-DB9M |

© Moxa Inc. All rights reserved. Updated Jan 09, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.