

# Fibre optic repeater for TP/FT-10

## LRW-702-F2

- ⌘ LONWORKS®, TP/FT-10, 78 kbit/s
- ⌘ Multimode/Singlemode SFP transceivers
- ⌘ Point to point, bus or redundant ring
- ⌘ Transparent repeater function
- ⌘ Optical signal regenerated
- ⌘ Alarm output indicating Fibre failure
- ⌘ 10 – 60 VDC supply
- ⌘ Easy to install
- ⌘ 35 mm DIN-rail housing

CE

EN 61000-6-2  
Industrial Immunity

EN 61000-6-4  
Industrial Emission

LRW-702-F2 is a LONWORKS® to fibre optic modem designed for Point to Point, multidrop or redundant ring applications. The design allows the use of a range of Westermo verified SFP (Small Form Pluggable) transceivers which can provide a variety of solutions, for example, only a single fibre or distances up to 120 km.


LRW-702-F2 is designed for harsh industrial usage meeting industrial level EMC specifications and having a wide operating temperature range. Because of the repeater functionality it eliminates the problem of jitter and hence ensures reliable communications in all situations. Total galvanic isolation and transient protection are standard for all interfaces.

The line interfaces are also equipped with extensive protection against over-currents and voltage suppression. The DIN mounted case of the unit makes it easy to mount. To allow for uninterrupted communication the units are designed with redundant power inputs that can be powered from two separate supplies and handle an operating voltage range of 10 – 60 VDC.

Ordering Information	
Art.no	Description
3651-1401	LRW-702-F2
3125-0150	PS-60, Power supply, DIN mounted

# Specifications LRW-702-F2

## Dimensional drawing

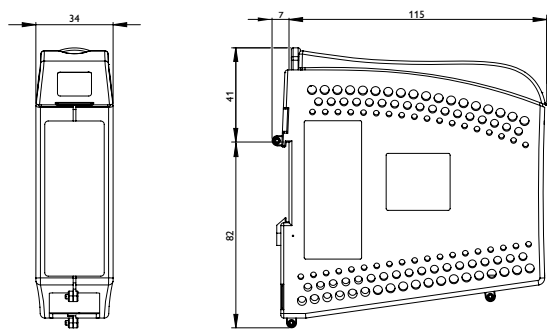

Dimension W x H x D    34 x 123 x 121 mm (1.33 x 4.84 x 4.76)  
Weight                    0.26 kg  
Degree of protection    IP21

Power	
Operating voltage	10 to 60 VDC 20 to 30 VAC
Rated current	400 mA @ 12 VDC 200 mA @ 24 VDC 100 mA @ 48 VDC
Interfaces	
Status	1 x 2-position detachable screw terminal
TP/FT-10	1 x 78.5 kbit/s
FX (Fibre)	1 or 2 x 100 Mbit SFP transceiver
Temperature	
Operating	-40 to +60°C (-40 to 140°F)
Storage & Transport	-40 to +70°C (-40 to 158°F)
Agency approvals and standards compliance	
EMC	EN 61000-6-2, Immunity industrial environments
	EN 61000-6-4, Emission industrial environments