



1.8" SATA SSD 3MG2-P


HIGHLIGHT FEATURES

- 1.8" SATA III solution for industrial field
- iSMART disk health monitoring
- Intelligent error recovery system
- iSMART disk health monitoring
- iData Guard for abnormal power failure
- Supports wide temperature from -40°C to 85°C

SPECIFICATIONS

Model Name	1.8" SATA SSD 3MG2-P
Flash Type	MLC
Interface	SATA III 6.0 Gb/s
Form Factor	1.8" SSD
Capacity	256GB ~ 1TB
Sequential R / W (MB/sec, max.)	520 / 450
P/E Cycle	3,000
TBW (Max.)	1,172
Storage Temperature	-55°C ~ 95°C
Max. Power Consumption	3.2W
Max. Channels	4
External DRAM Buffer	Y
H/W Write Protect	N
S.M.A.R.T.	Y
AES	Y
TCG Opal	Y
Dimension (W x L x H/mm)	54.0 x 78.5 x 5.0
Vibration	20G@[7 ~ 2000Hz]
Shock	1500G@0.5ms
MTBF	>3 million hours
Warranty	3 Years

DIAGRAM

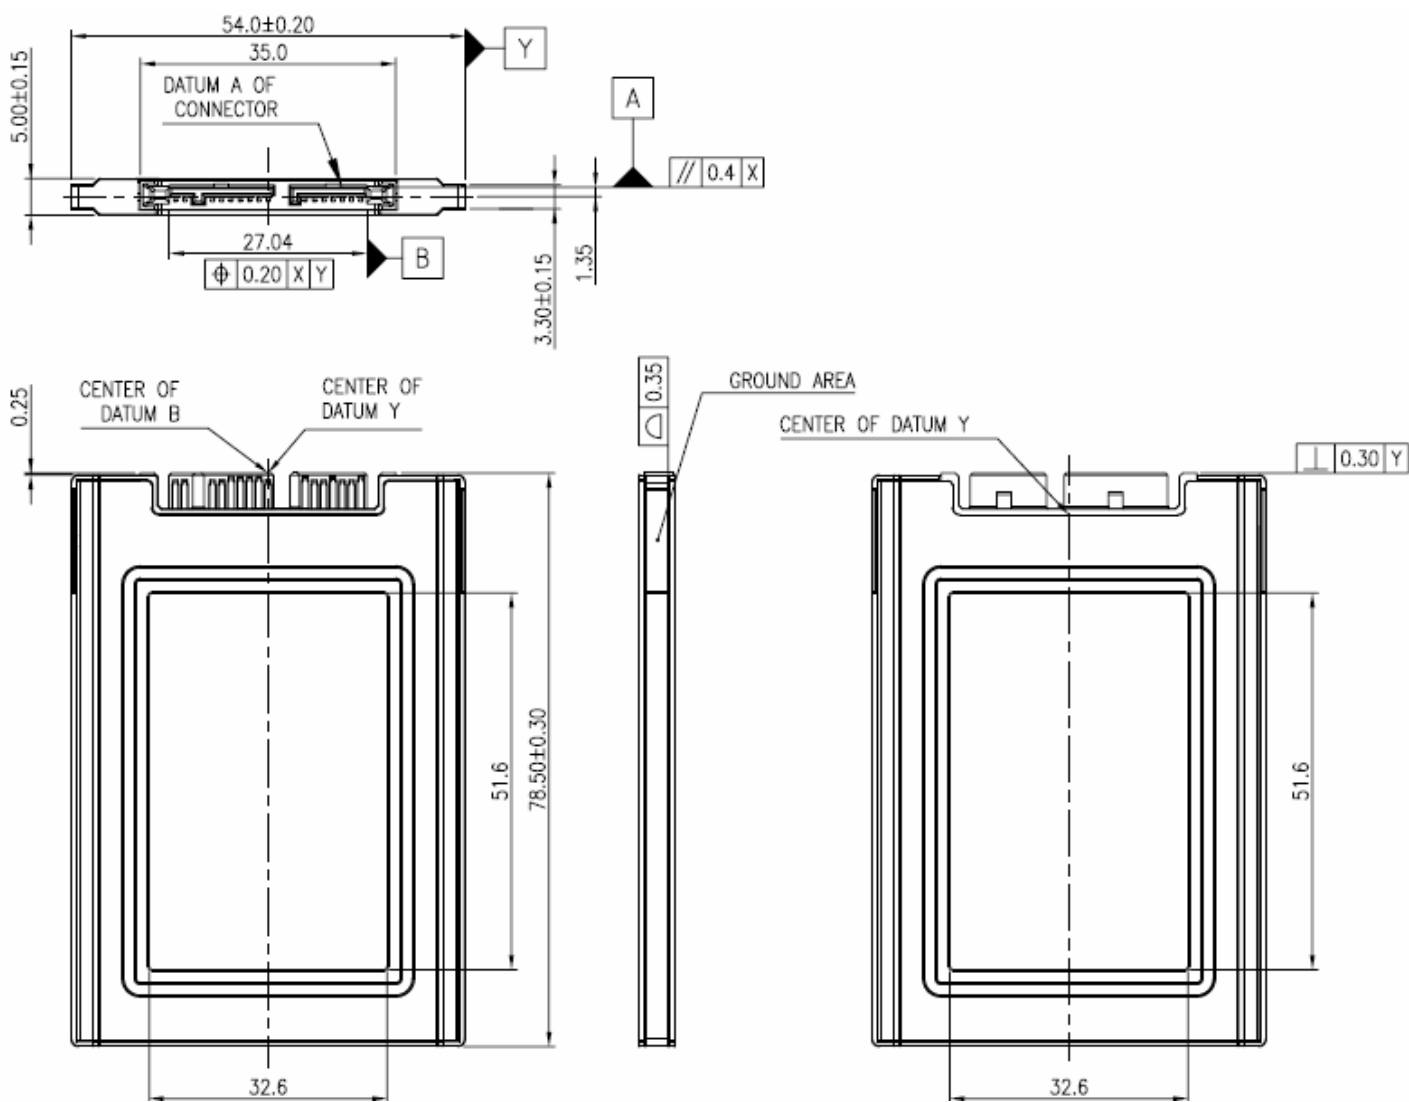

ORDER INFO.

Operating Temperature	Standard Grade (0°C ~ 70°C)	Industrial Grade (-40°C ~ 85°C)
256GB	DGS18-B56D81BCAQ	DGS18-B56D81BWAQ
512GB	DGS18-C12D81BCAQ	DGS18-C12D81BWAQ
1TB	DGS18-01TD81BCBQ	DGS18-01TD81BWBQ

HQ (Taiwan) T +886-2-7703-3000 / E sales@innodisk.com

CN T +86-755-2167-3689 / E sales_cn@innodisk.com

US T +1-510-770-9421 / E usasales@innodisk.com

EU T +31-40-3045-400 / E eusales@innodisk.com

JP T +81-3-6667-0161 / E jp_sales@innodisk.com

