

USB Drive 3IE4

HIGHLIGHT FEATURES




- Excellent data transfer speed
- Wear-leveling supported
- Low power consumption
- Metal Housing for ESD proof
- Connector plated with 30μ" gold

SPECIFICATIONS

Model Name	USB Drive 3IE4
Flash Type	iSLC (3D TLC)
Interface	USB 3.2 Gen1
Form Factor	USB Drive
Capacity	16GB ~ 128GB
Sequential R / W (MB/sec, max.)	330 / 125
P/E Cycle	20,000
TBW (Max.)	2,273
Storage Temperature	-40°C ~ 85°C
Max. Power Consumption	1.3W
Max. Channels	2
External DRAM Buffer	N
H/W Write Protect	N
S.M.A.R.T.	Y
AES	N
TCG Opal	N
Dimension (W x L x H/mm)	16.60 x 61.45 x 7.60
Vibration	20G@[7 ~ 2000Hz]
Shock	1500G@0.5ms
MTBF	>3 million hours
Warranty	5 Years

DIAGRAM

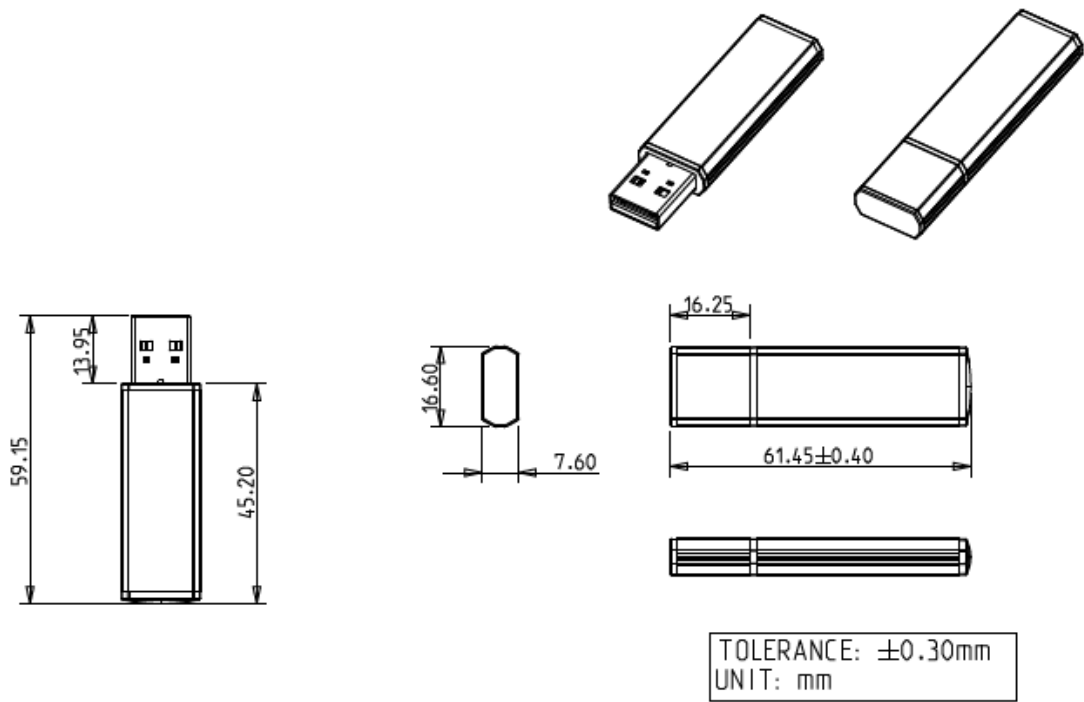

ORDER INFO.

Operating Temperature	Standard Grade (0°C ~ 70°C)	Industrial Grade (-40°C ~ 85°C)
16GB	DHUA1-16GID1KCASF	DHUA1-16GID1KWASF
32GB	DHUA1-32GID1KCADF	DHUA1-32GID1KWADF
64GB	DHUA1-64GID1KCADF	DHUA1-64GID1KWADF
128GB	DHUA1-A28ID1KCADF	DHUA1-A28ID1KWADF

HQ (Taiwan) T +886-2-7703-8000 / E sales@innodisk.com

CN T +86-755-2167-3689 / E sales_cn@innodisk.com

US T +1-510-770-9801 / E usasales@innodisk.com

EU T +31-40-8045-400 / E eusales@innodisk.com

JP T +81-3-6667-0161 / E jp_sales@innodisk.com

