



mSATA mini 3IE3


HIGHLIGHT FEATURES

- SATA 6.0Gb/s interface
- iSMART disk health monitoring
- Intelligent error recovery system
- Excellent data transfer speed
- Zero mechanical interference
- Anti-vibration mechanical design

SPECIFICATIONS

Model Name	mSATA mini 3IE3
Flash Type	iSLC (MLC)
Interface	SATA III 6.0 Gb/s
Form Factor	MO-300B
Capacity	8GB ~ 64GB
Sequential R / W (MB/sec, max.)	230 / 170
P/E Cycle	20,000
TBW (Max.)	173
Storage Temperature	-55°C ~ 95°C
Max. Power Consumption	0.6W
Max. Channels	2
External DRAM Buffer	N
H/W Write Protect	N
S.M.A.R.T.	Y
AES	N
TCG Opal	N
Dimension (W x L x H/mm)	29.85 x 26.8 x 3.7
Vibration	20G@[7 ~ 2000Hz]
Shock	1500G@0.5ms
MTBF	>3 million hours
Warranty	5 Years

DIAGRAM

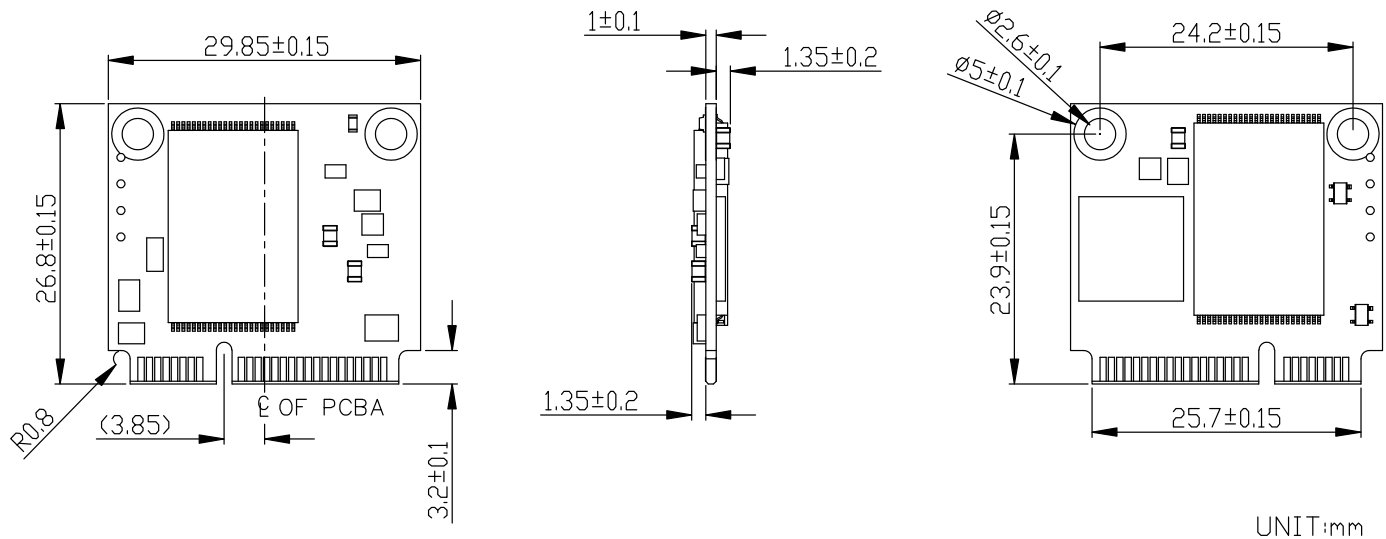

ORDER INFO.

Operating Temperature	Standard Grade (0°C ~ 70°C)	Industrial Grade (-40°C ~ 85°C)
8GB	DHMSM-08GD09BC1&C	DHMSM-08GD09BW1&C
16GB	DHMSM-16GD09BC1DC	DHMSM-16GD09BW1DC
32GB	DHMSM-32GD09BC1DC	DHMSM-32GD09BW1DC
64GB	DHMSM-64GD09BC1DC	DHMSM-64GD09BW1DC

&. S : 1 channel / D : 2 channels

HQ (Taiwan) T +886-2-7703-3000 / E sales@innodisk.com

CN T +86-755-2167-3689 / E sales_cn@innodisk.com

US T +1-510-770-9421 / E usasales@innodisk.com

EU T +31-40-3045-400 / E eusales@innodisk.com

JP T +81-3-6667-0161 / E jp_sales@innodisk.com

innodisk