

MPC-2101 Series

10-inch industrial fanless panel computers



Features and Benefits

- 10-inch panel computer
- Intel Atom® processor E3845 1.91 GHz
- 1000-nit sunlight-readable LCD
- -40 to 70°C wide-temperature design, no fan or heater
- EN 50155:2017 compliant

Certifications




Introduction

The MPC-2101 10-inch panel computers with E3800 Series Intel Atom® processor deliver a reliable, durable, and versatile platform for use in industrial environments. All interfaces come with IP66-rated M12 connectors to provide anti-vibration and waterproof connections. With two software-selectable RS-232/422/485 serial ports and two Ethernet LAN ports, the MPC-2101 panel computers support a wide variety of serial interfaces as well as high-speed IT communications, all with native network redundancy.

The MPC-2101 Series panel computers are designed with a wide, -40 to 70°C temperature range, and come with a fanless, streamlined enclosure designed for highly efficient heat dissipation, making this one of the most reliable industrial platforms available for vibration prone, harsh, hot, outdoor environments. The MPC-2101 also features a 1000-nit LCD panel offering a sunlight readable, projected-capacitive, multi-touch screen, providing an excellent user experience.

Appearance

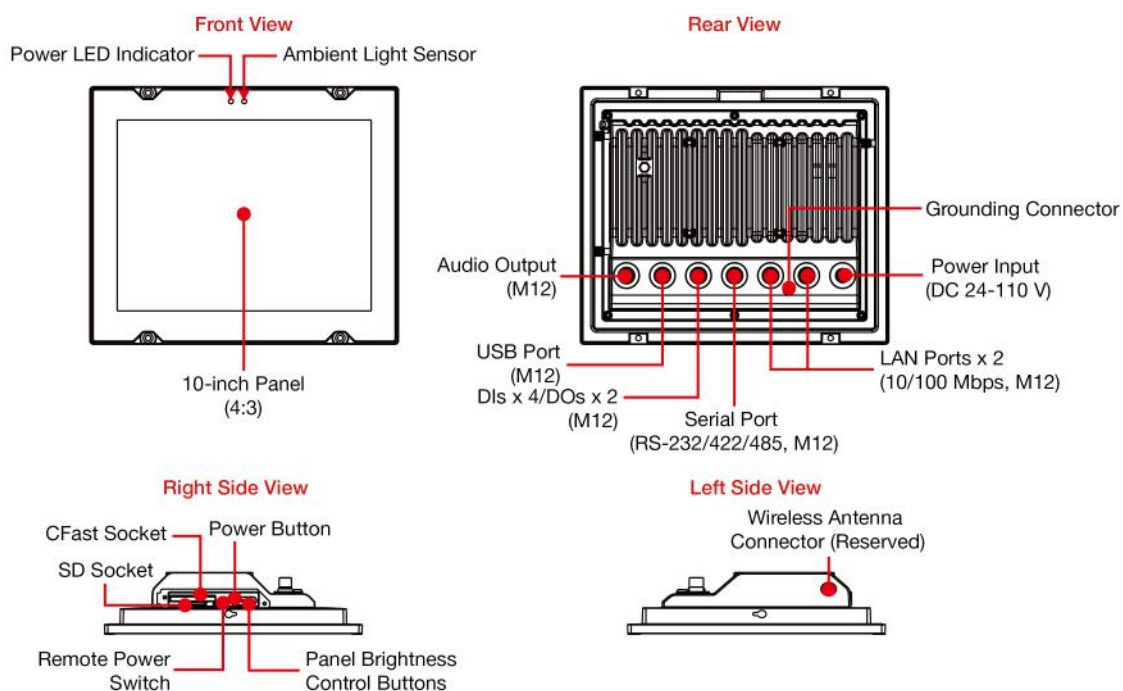

Specifications

Computer

CPU	Intel Atom® E3845 processor (2M cache, 1.91 GHz)
System Memory Slot	SODIMM DDR3/DDR3L slots x 1
System Memory Pre-installed	4 (8GB Max.) GB DDR3L
Pre-installed OS	MPC-2101-E4-LB-CT-T-W7E/MPC-2101-E4-CT-T-W7E: Windows Embedded Standard 7 (WS7P) 64-bit MPC-2101-E4-LB-CT-T-LX/MPC-2101-E4-CT-T-LX: Linux Debian 9
Storage Slot	CFast slot x 1 SD slots x 1, SD 3.0 interface (SDHC/SDXC)
Storage Pre-installed	MPC-2101-E4-LB-CT-T-LX/W7E, MPC-2101-E4-CT-T-LX/W7E: 32 GB CFast card
Expansion Slots	Mini PCIe
Supported OS	Windows 10 Pro (64-bit) Windows 10 IoT Enterprise LTSC 2019 Value (64-bit) Windows 10 Enterprise IoT LTSC 2016 Windows 7 Pro for Embedded Systems Windows Embedded Standard 7 (64-bit) Linux Debian 9
Graphics Controller	Intel® HD Graphics

Computer Interface

Ethernet Ports	Auto-sensing 10/100 Mbps ports (M12 D-coded 4P connector) x 2
Serial Ports	RS-232/422/485 ports x 1 (M12 A-code 12P connector)
Digital Input	DI s x 4 (M12 A-coded connector)
Digital Output	DOs x 2 (M12 A-coded connector)
USB 2.0	USB 2.0 hosts x 1 (M12 A-coded 5P connector)

LED Indicators

System	Power x 1
--------	-----------

Display


Panel Size	10.4 in (viewable image)
Pixel Pitch (RGB)	0.240 (H) x 0.240 (V) mm
Contrast Ratio	1000:1
Active Display Area	210.4 (H) x 157.8 (V) mm
Aspect Ratio	4:3
Viewing Angles	176°/176°
Max. No. of Colors	16.2M (8-bit/color)
Response Time	5 ms (gray to gray)
Pixels	1024 x 768
Light Intensity (Brightness)	500/1000 nits

Touch Function	
Touch Support Points	4 points
Touch Type	Projective Capacitive touchscreen (PCAP)
Glove Support	Yes
Serial Interface	
Baudrate	50 bps to 115.2 kbps
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2
Parity	None, Even, Odd, Space, Mark
Flow Control	RTS/CTS, XON/XOFF
Serial Signals	
RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND
Power Parameters	
Input Voltage	24 to 110 VDC
Physical Characteristics	
Housing	Metal
IP Rating	IP66
Dimensions	256.9 x 214.4 x 58.9 mm (10.11 x 8.44 x 2.32 in)
Weight	2,417 g (5.33 lb)
Environmental Limits	
Operating Temperature	-40 to 70°C (-40 to 158°F)
Storage Temperature (package included)	-40 to 70°C (-40 to 158°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Standards and Certifications	
EMC	EN55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Mechanical Protection Rating	IEC 60529, IP code
Safety	IEC 62368-1, IEC 60950-1, UL 62368-1

Shock	EN 50155 standard
Vibration	EN 50155 standard
Declaration	
Green Product	RoHS, CRoHS, WEEE
Warranty	
Warranty Period	System: 3 years LCD: 1 year
Details	See www.moxa.com/warranty
Package Contents	
Device	1 x MPC-2101 Series computer
Installation Kit	1 x M12-Phone jack power cable 1 x M12 Type-A USB cable 1 x terminal block, 2-pin (for remote power input) 6 x screws, for panel-mounting
Documentation	1 x quick installation guide 1 x warranty card

Dimensions

Unit: mm (inch)

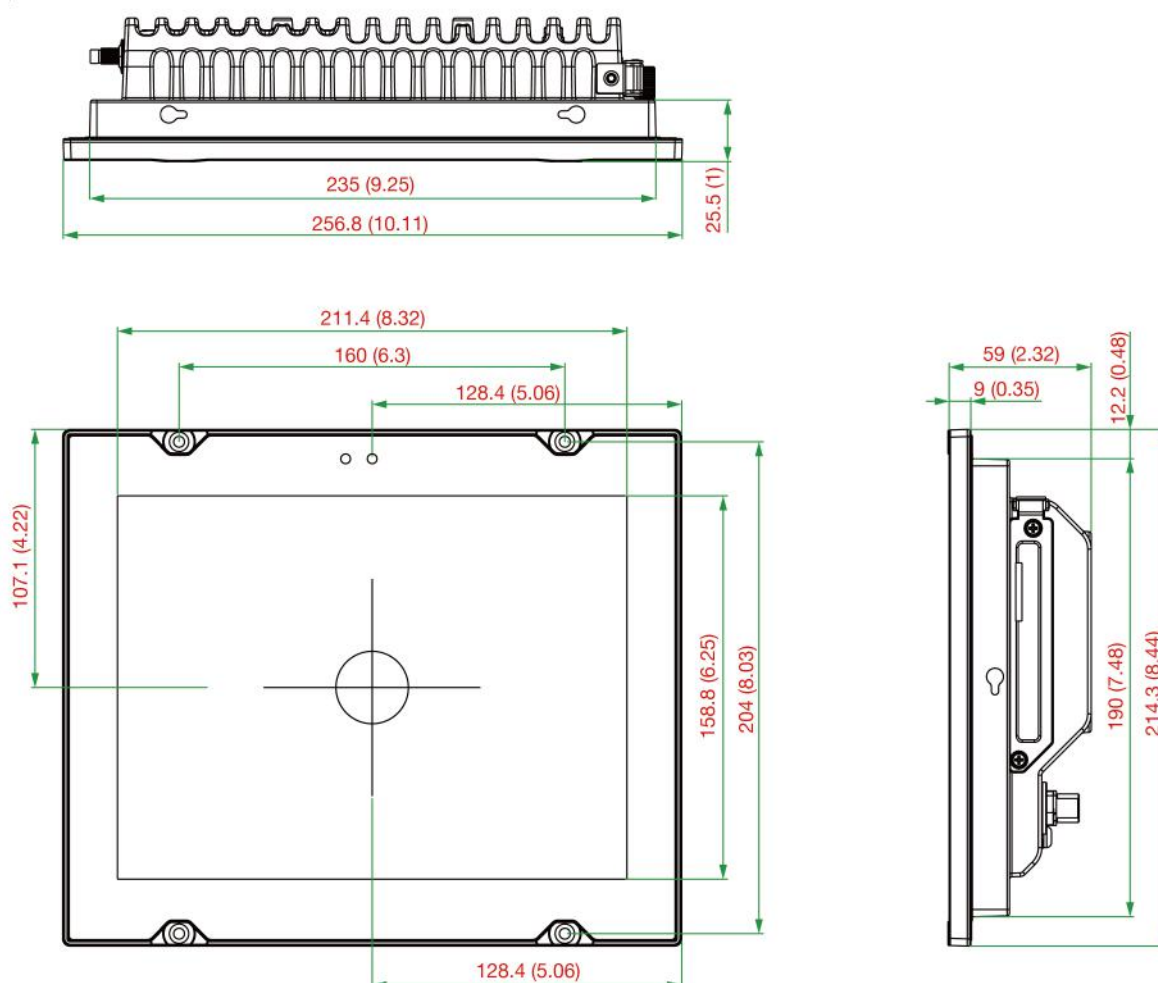

Ordering Information

Model Name	Panel	CPU	RAM	OS Preinstalled	LAN	Serial	USB 2.0 Port	DI/DO	Power Input	IP Rating	Operating Temp.
MPC-2101-E4-LB-CT-T-W7E	10" (4:3) 500 nits	E3845 Quad core	4 GB	W7E (64-bit)	2 (M12)	1 (M12)	1 (M12)	4/2 (M12)	24 to 110 VDC	IP66	-40 to 70°C
MPC-2101-E4-CT-T-W7E	10" (4:3) 1,000 nits	E3845 Quad core	4 GB	W7E (64-bit)	2 (M12)	1 (M12)	1 (M12)	4/2 (M12)	24 to 110 VDC	IP66	-40 to 70°C
MPC-2101-E4-LB-CT-T-LX	10" (4:3) 500 nits	E3845 Quad core	4 GB	Debian 9	2 (M12)	1 (M12)	1 (M12)	4/2 (M12)	24 to 110 VDC	IP66	-40 to 70°C
MPC-2101-E4-CT-T-LX	10" (4:3) 1,000 nits	E3845 Quad core	4 GB	Debian 9	2 (M12)	1 (M12)	1 (M12)	4/2 (M12)	24 to 110 VDC	IP66	-40 to 70°C
MPC-2101-E4-LB-CT-T	10" (4:3) 500 nits	E3845 Quad core	4 GB	-	2 (M12)	1 (M12)	1 (M12)	4/2 (M12)	24 to 110 VDC	IP66	-40 to 70°C
MPC-2101-E4-CT-T	10" (4:3) 1,000 nits	E3845 Quad core	4 GB	-	2 (M12)	1 (M12)	1 (M12)	4/2 (M12)	24 to 110 VDC	IP66	-40 to 70°C

© Moxa Inc. All rights reserved. Updated Jan 06, 2025.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.